

# DOUBLE POLE TOGGLE SWITCH

## Wiring for two motors to a double pole toggle switch

**NOTICE:** For installation by a qualified electrician in accordance with national and local electrical codes, and the following instructions.

**CAUTION:** RISK OF ELECTRICAL SHOCK. Disconnect power before installing. Never wire energized electrical components.

Select conductors having 90°C or higher rated insulation having sufficient ampacity in accordance with the 60°C column of National Electrical Code® Table 310-16 or Canadian Electrical Code Table 2


Terminal capacity: #14 AWG to #10 AWG

Strip conductors using strip gage on switch body. DO NOT USE TIN CONDUCTORS.

### Warning

**DO NOT** wire more than one operator to a single pole switch. A second operator can be wired to the second pole of a double pole switch.

**DO NOT** connect two switches to an operator without a relay.

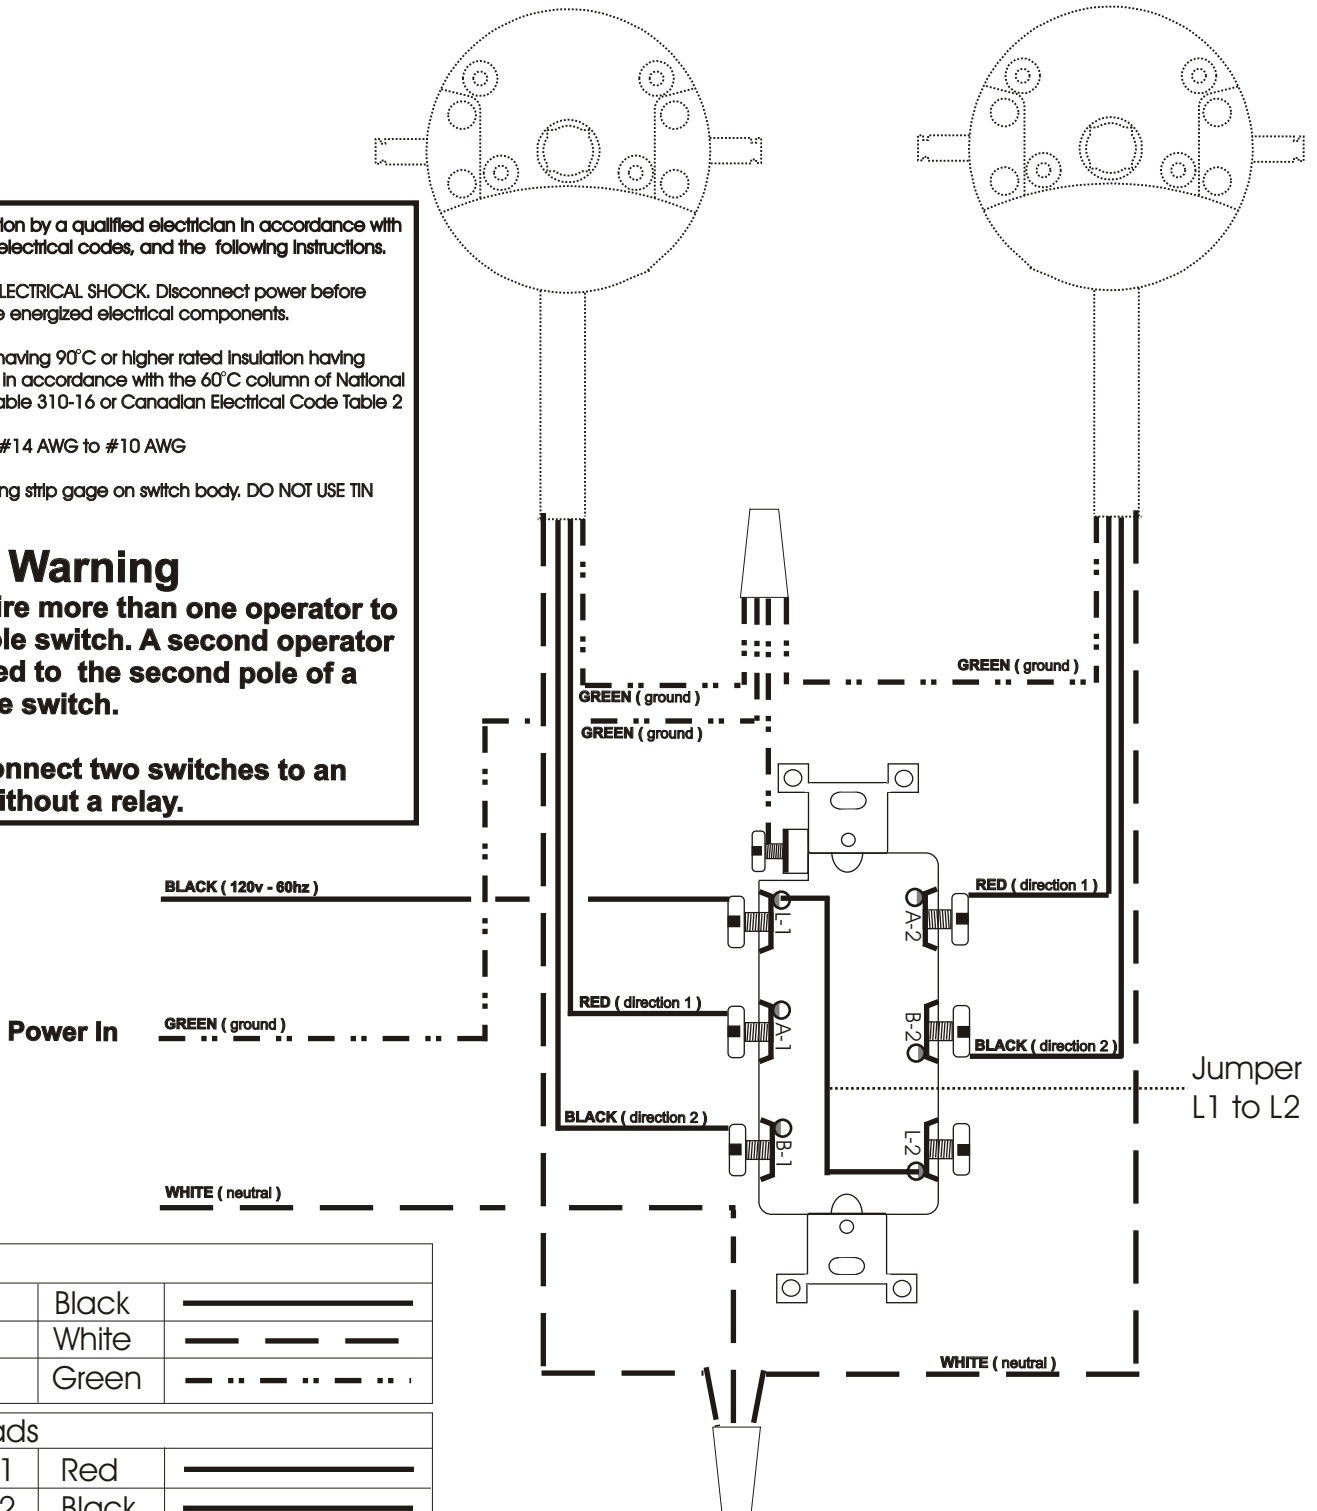

Power in		
Hot	Black	—————
Neutral	White	- - - - -
Ground	Green	- · - · - · - · - · - ·

Motor Leads		
Direction 1	Red	—————
Direction 2	Black	—————
Neutral	White	- - - - -
Ground	Green	- · - · - · - · - · - ·